


Final resistance (maximum recommended) is 1.0" w.g. (250 Pa.)

System design may dictate a lower change out point.

Maximum continuous operating temperature 160° F (71° C).

Consult factory before operating in dotted line region.

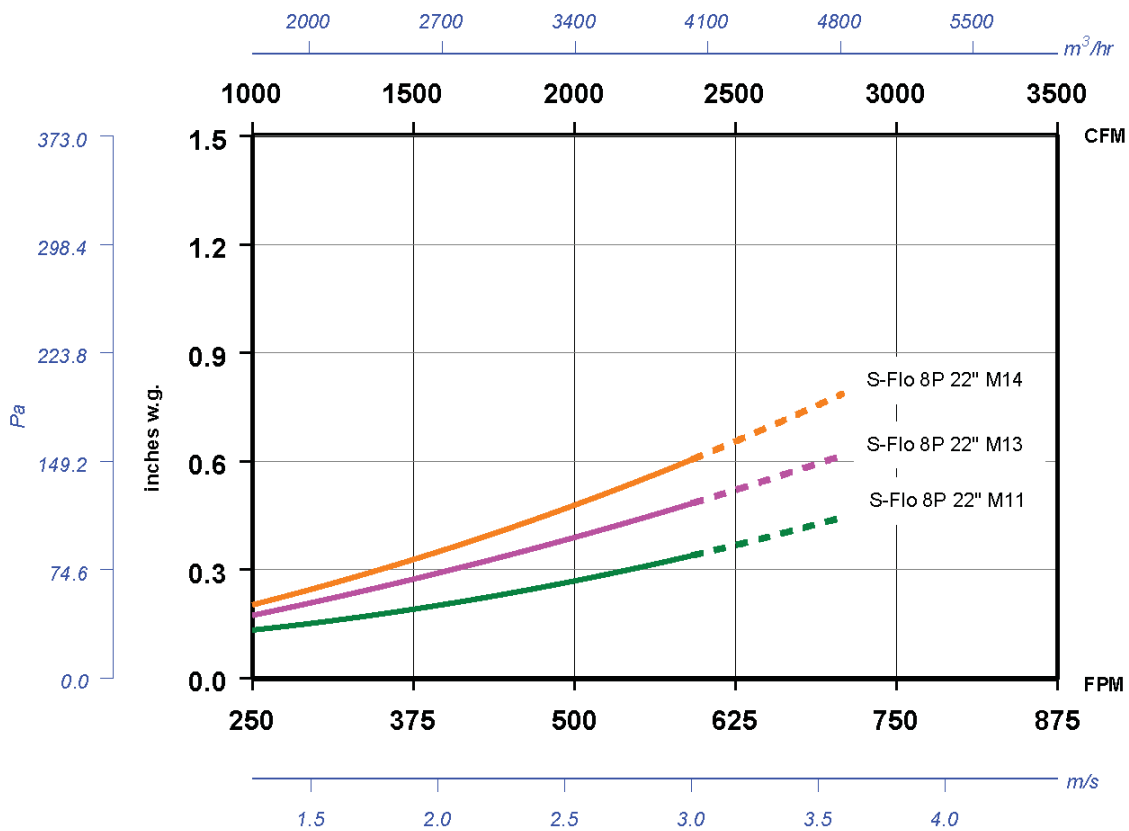

Camfil Farr	Technical Data
S-Flo <sup>®</sup> 22" Deep	1205 - IRVA - 0907
Camfil Farr - clean air solutions	