


NOMINAL SIZE (INCH)	ACTUAL SIZE		ORDERING REFERENCE	AIRFLOW CAPACITY (CFM)	MEDIA AREA (SQ FT)	WEIGHT (LBS)
	H	W				
20 X 16 X 1	19.50	15.50	054862001	780	5.4	0.60
20 X 20 X 1	19.50	19.50	054862002	970	6.6	0.75
25 X 20 X 1	24.50	19.50	054862003	1215	8.3	0.94
25 X 16 X 1	24.50	15.50	054862004	970	6.7	0.75
24 X 24 X 1	23.50	23.50	054862005	1400	9.8	1.08
20 X 14 X 1	19.50	13.50	054862006	680	4.6	0.53
25 X 14 X 1	24.50	13.50	054862007	850	5.7	0.66
20 X 15 X 1	19.50	14.50	054862008	730	5.1	0.56
20 X 7 X 1	19.50	6.50	054862009	340	2.4	0.30
24 X 12 X 1	23.50	11.50	054862010	700	4.9	0.54
24 X 20 X 1	23.50	19.50	054862011	1170	8.0	0.90
16 X 16 X 1	15.50	15.50	054862012	620	4.3	0.48
25 X 15 X 1	24.50	14.50	054862013	910	6.4	0.70
25 X 25 X 1	24.50	24.50	054862014	1520	10.5	1.17
24 X 16 X 1	23.50	15.50	054862015	930	6.5	0.72
20 X 10 X 1	19.50	9.50	054862016	490	3.3	0.38
25 X 18 X 1	24.50	17.50	054862017	1100	7.6	0.84
20 X 12 X 1	19.50	11.50	054862019	580	4.1	0.45
20 X 18 X 1	19.50	17.50	054862020	880	6.1	0.68
22 X 22 X 1	21.50	21.50	054862021	1180	8.2	0.91
24 X 10 X 1	23.50	9.50	054862022	580	4.0	0.45
25 X 10 X 1	24.50	9.50	054862023	610	4.1	0.47
25 X 12 X 1	24.50	11.50	054862024	730	5.2	0.56
12 X 12 X 1	11.50	11.50	054862025	350	2.5	0.27
24 X 18 X 1	23.50	17.50	054862028	1050	7.3	0.81
INITIAL PRESSURE DROP (IN. W.G.)			0.23			
FINAL PRESSURE DROP (IN. W.G.)			1.00			

NOMINAL SIZE (INCH)	ACTUAL SIZE		ORDERING REFERENCE	AIRFLOW CAPACITY (CFM)	MEDIA AREA (SQ FT)	WEIGHT (LBS)
	H	W				
20 X 16 X 2	19.50	15.50	049880001	1110	9.9	1.00
20 X 20 X 2	19.50	19.50	049880002	1390	11.9	1.15
25 X 20 X 2	24.50	19.50	049880003	1740	14.9	1.45
25 X 16 X 2	24.50	15.50	049880004	1390	12.4	1.15
24 X 24 X 2	23.38	23.38	049880005	2000	17.3	1.58
24 X 12 X 2	23.38	11.38	049880006	1000	8.4	0.82
20 X 12 X 2	19.50	11.88	049880007	835	7.4	0.70
20 X 10 X 2	19.50	9.50	049880008	700	6.0	0.65
20 X 14 X 2	19.50	13.50	049880009	975	8.3	0.76
25 X 14 X 2	24.50	13.50	049880010	1220	10.4	1.00
20 X 15 X 2	19.50	14.50	049880011	1045	9.3	0.85
24 X 20 X 2	23.50	19.50	049880012	1670	14.3	1.35
20 X 18 X 2	19.50	17.50	049880013	1250	10.8	1.10
25 X 18 X 2	24.50	17.50	049880014	1565	13.5	1.30
24 X 18 X 2	23.50	17.50	049880015	1500	13.0	1.25
24 X 16 X 2	23.50	15.50	049880016	1335	11.8	1.00
25 X 25 X 2	24.50	24.50	049880018	2170	19.0	1.71
16 X 16 X 2	15.50	15.50	049880019	890	7.8	0.67
25 X 15 X 2	24.50	14.50	049880020	1300	11.6	0.98
INITIAL PRESSURE DROP (IN. W.G.)			0.31			
FINAL PRESSURE DROP (IN. W.G.)			1.00			

NOMINAL SIZE (INCH)	ACTUAL SIZE		ORDERING REFERENCE	AIRFLOW CAPACITY (CFM)	MEDIA AREA (SQ FT)	WEIGHT (LBS)
	H	W				
24 X 24 X 4	23.38	23.38	059413001	2000	27.7	2.90
24 X 12 X 4	23.38	11.38	059413002	1000	13.9	1.50
20 X 20 X 4	19.38	19.38	059413003	1390	18.9	2.02
20 X 16 X 4	19.38	15.38	059413004	1110	15.7	1.61
25 X 16 X 4	24.38	15.38	059413005	1390	19.7	2.10
25 X 20 X 4	24.38	19.38	059413006	1740	23.6	2.51
25 X 29 X 4	24.38	28.38	059413007	2520	35.4	3.65
24 X 20 X 4	23.38	19.38	059413008	1670	22.7	2.41
24 X 18 X 4	23.38	17.38	059413009	1500	20.2	2.20
25 X 25 X 4	24.38	24.38	059413010	2170	30.1	3.15
24 X 16 X 4	23.38	15.38	059413011	1330	18.7	1.93
INITIAL PRESSURE DROP (IN. W.G.)			0.27			
FINAL PRESSURE DROP (IN. W.G.)			1.00			

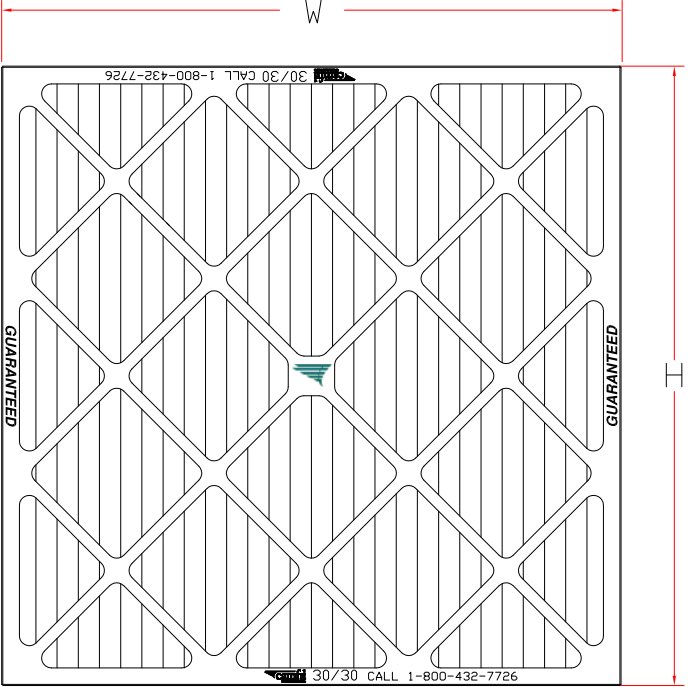

GENERAL NOTES:

- MEDIUM EFFICIENCY, MERV 8 (30-35%) PANEL PLEATED DISPOSABLE. FILTER EFFICIENCY IS MINIMUM MERV RATING WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.2-1999 AND MINIMUM DUST SPOT EFFICIENCY WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.1-1992.
- AVAILABLE SIZES (NOMINAL) AND EFFICIENCIES: SEE TABULATION BLOCK.
- SEE CAMFIL FARR BULLETIN 1002-(LATEST REV.) FOR OTHER FEATURES, CONSTRUCTION AND PERFORMANCE CHARACTERISTICS.
- FILTER CLASSIFIED BY UNDERWRITERS LABORATORIES AS TO FLAMMABILITY ONLY U.L. CLASS 2.
- PHYSICAL DATA (MATERIAL OF CONSTRUCTION):
 - A. FRAME: HIGH WET-STRENGTH BEVERAGE BOARD WITH DIAGONAL SUPPORT MEMBERS.
 - B. MEDIA: PLEATED, NON-WOVEN, REINFORCED COTTON/SYNTHETIC MEDIA BLEND, BONDED TO A WELDED WIRE SUPPORT GRID.
- ORDERING INSTRUCTIONS: SPECIFY BY NAME, MEDIA TYPE (EFFICIENCY), U.L. CLASS, NOMINAL SIZE (HxWxD) AND ORDERING REFERENCE.
 - EXAMPLE:
 - 30/30 U.L. CLASS 2, SIZE 24x24x2, P/N 049880005
 - 30/30 U.L. CLASS 2, SIZE 24x18x4, P/N 059423009.
- FILTER THICKNESS:
 - 1" NOMINAL = .88" ACTUAL
 - 2" NOMINAL = 1.75" ACTUAL
 - 4" NOMINAL = 3.75" ACTUAL

PERFORMANCE NOTES:

- SEE TABULATION BLOCK FOR PRESSURE DROP (INITIAL AND FINAL) AND AIRFLOW CAPACITY. PERFORMANCE TOLERANCE IS IN ACCORDANCE WITH AIR STANDARD 850, SECTION 7.4.
- CAMFIL FARR RECOMMENDS FILTER TO BE INSTALLED WITH THE PLEATS RUNNING PARALLEL TO HEIGHT DIMENSION.
- OPERATING TEMPERATURE:
 - A. CONTINUOUS = 180°F
 - B. CONTINUOUS = 200°F
- SEE RESISTANCE VERSUS AIRFLOW BULLETIN 1002-IRVA-(LATEST REV.) FOR VARIOUS AIRFLOW CAPACITIES

U	2/21/08	REVISED PRESSURE DROP	14016-HF	AC	-	-
A	08/15/72	FIRST ISSUE	7680-N	-	-	-
REV	DATE	DESCRIPTION	EWO	DFT	CK	APP



DESCRIPTION		
30/30 MV8 CL2 FILTER		
30-35%		
.88, 1.75 & 3.75 THICK		
SHEET	DRAWING NUMBER	REV
1 OF 1	068766	U

MFG. DWG. (SEE ORDERING REF.)