

# 30/30<sup>®</sup> sa


## Initial Resistance Versus Airflow

Final resistance (maximum recommended) is 1.0" w.g. (250 Pa.)

System design may dictate a lower change out point.

Maximum continuous operating temperature 180° F (82° C).

Consult factory before operating in dotted line region.

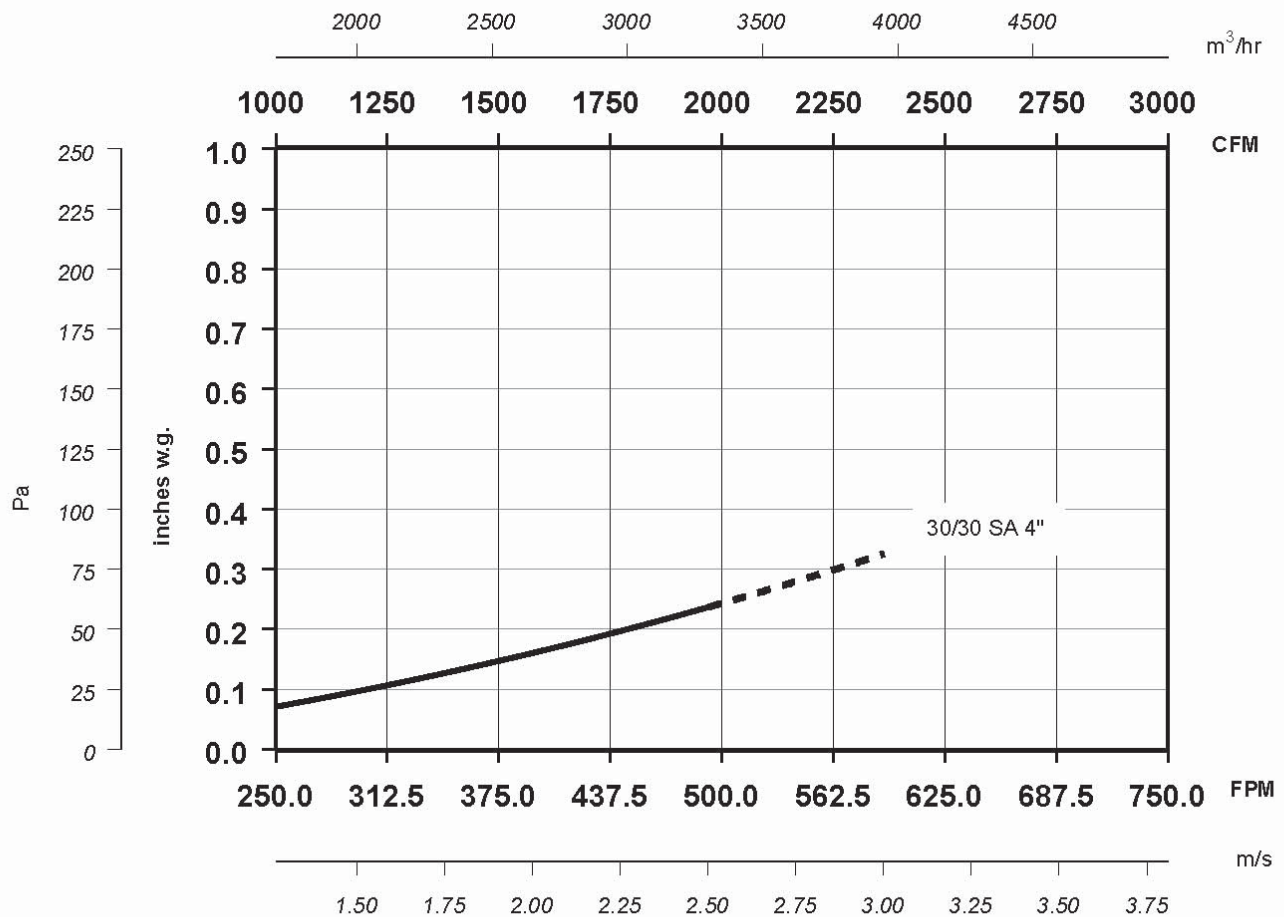

Camfil Farr	Technical Data
30/30 <sup>®</sup> SA	1003-IRVA - 0907
Camfil Farr - clean air solutions	