

ACTUAL SIZE		POCKET DEPTH	NOMINAL SIZE	ORDERING REFERENCE								NUMBER OF POCKETS
H	W	L		MEDIA EFFICIENCY VS PART NUMBER								
				HF45	HF45-W	HF65	HF65-W	HF85	HF85-W	HF95	HF95-W	
23.31	23.31	15, 22, 30, 32, 36	24/24/L	402456A**	402461A**	402458A**	401740A**	402460A**	401741A**	402462A**	401742A**	6
23.31	19.31		24/20/L	402456B**	402461B**	402458B**	401740B**	402460B**	401741B**	402462B**	401742B**	5
23.31	11.31		24/12/L	402456C**	402461C**	402458C**	401740C**	402460C**	401741C**	402462C**	401742C**	3
19.31	19.31		20/20/L	402456D**	402461D**	402458D**	401740D**	402460D**	401741D**	402462D**	401742D**	5
19.31	23.31		20/24/L	402456E**	402461E**	402458E**	401740E**	492460E**	401741E**	402462E**	401742E**	6
11.31	23.31		12/24/L	402456F**	402461F**	402458F**	401740F**	402460F**	401741F**	402462F**	401742F**	6
23.31	23.31	15, 22, 30, 32, 36	24/24/L	402459A**	402498A**	402501A**	401745A**	402502A**	401757A**	402503A**	401758A**	8
23.31	19.31		24/20/L	402459B**	402498B**	402501B**	401745B**	402502B**	401757B**	402503B**	401758B**	7
23.31	11.31		24/12/L	402459C**	402498C**	402501C**	401745C**	402502C**	401757C**	402503C**	401758C**	4
19.31	19.31		20/20/L	402459D**	402498D**	402501D**	401745D**	402502D**	401757D**	402503D**	401758D**	7
19.31	23.31		20/24/L	402459E**	402498E**	402501E**	401745E**	402502E**	401757E**	402503E**	401758E**	8
11.31	23.31		12/24/L	402459F**	402498F**	402501F**	401745F**	402502F**	401757F**	402503F**	401758F**	8
23.31	23.31	15, 22, 30, 32, 36	24/24/L	402463A**	402499A**	401771A**	401760A**	402504A**	401761A**	401775A**	401764A**	10
23.31	19.31		24/20/L	402463B**	402499B**	401771B**	401760B**	402504B**	401761B**	401775B**	401764B**	8
23.31	11.31		24/12/L	402463C**	402499C**	401771C**	401760C**	402504C**	401761C**	401775C**	401764C**	5
19.31	19.31		20/20/L	402463D**	402499D**	401771D**	401760D**	402504D**	401761D**	401775D**	401764D**	8
19.31	23.31		20/24/L	402463E**	402499E**	401771E**	401760E**	402504E**	401761E**	401775E**	401764E**	10
11.31	23.31		12/24/L	402463F**	402499F**	401771F**	401760F**	402504F**	401761F**	401775F**	401764F**	10
23.31	23.31	15, 22, 30, 32, 36	24/24/L	402479A**	402500A**	401772A**	401765A**	401773A**	401766A**	401774A**	401769A**	12
23.31	19.31		24/20/L	402479B**	402500B**	401772B**	401765B**	401773B**	401766B**	401774B**	401769B**	9
23.31	11.31		24/12/L	402479C**	402500C**	401772C**	401765C**	401773C**	401766C**	401774C**	401769C**	6
19.31	19.31		20/20/L	402479D**	402500D**	401772D**	401765D**	401773D**	401766D**	401774D**	401769D**	9
19.31	23.31		20/24/L	402479E**	402500E**	401772E**	401765E**	401773E**	401766E**	401774E**	401769E**	12
11.31	23.31		12/24/L	402479F**	402500F**	401772F**	401765F**	401773F**	401766F**	401774F**	401769F**	12



GENERAL NOTES:

- MEDIUM EFFICIENCY, MERV 9-14 (45-95%) EXTENDED SURFACE DISPOSABLE. FILTER EFFICIENCY IS MINIMUM MERV RATING WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.2-1999 AND MINIMUM DUST SPOT EFFICIENCY WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.1-1992.
- AVAILABLE SIZES (NOMINAL) AND EFFICIENCIES: SEE TABULATION BLOCK. REFER TO MODEL DESIGNATION FOR PROPER PART NUMBER.
- SEE CAMFIL FARR BULLETIN 1203-(LATEST REV.) FOR OTHER FEATURES, CONSTRUCTION AND PERFORMANCE CHARACTERISTICS.
- FILTER CLASSIFIED BY UNDERWRITERS LABORATORIES AS TO FLAMMABILITY ONLY U.L. CLASS 2
- PHYSICAL DATA (MATERIALS OF CONSTRUCTION):
 - HEADER FRAME, RETAINERS, RETAINER AND CORNER CLIPS, GALVANIZED STEEL.
 - MEDIA: HIGH LOFTED AIR LAID FIBERGLASS STITCHED TO A UNIFORM TAPEDED POCKET WIDTH, BONDED TO RETAINERS AND HEADER FRAME.
- GASKET (1/4 X 1/2 THICK) POLYURETHANE FOAM IS INSTALLED ONLY ON 'H' SIDE OF 24X24, 24X20 & 20X20 FILTERS AND BOTH 'H' & 'W' SIDES OF 24X12 & 12X24 FILTERS
- REPLACE '***' IN THE PART NUMBER WITH RESPECTIVE POCKET DEPTH (L = 15, 22, 30, 32 OR 36).
 EXAMPLE:
 HF45/24/20/30/6 ORDERING REFERENCE = 402456B30 (PART NUMBER).
 HF65/20/20/32/8-W ORDERING REFERENCE = 401745D32 (PART NUMBER).

ORDERING INFORMATION:

- THE FILTER NOMINAL FACE HEIGHT AND WIDTH DIMENSIONS ARE PRECEDED BY THE EFFICIENCY AND SUPERSEDED BY THE NUMBER OF POCKETS TO CREATE THE MODEL DESIGNATION. THE DEPTH IS INDICATED BY THE ACTUAL VALUE 15, 22, 30, 32 OR 36. THE 1.12" HEADER THICKNESS IS INDICATED BY 'W' AT THE END OF THE MODEL DESIGNATION.
- THE NINE DIGIT ALPHANUMERIC IS THE RESPECTIVE PART NUMBER TO BE ORDERED. WHEN ORDERING, INDICATE MODEL DESIGNATION AND ALPHANUMERIC PART NUMBER.
 EXAMPLE:
 HF65/24/20/22/8 = P/N 402501B22

ORDERING INSTRUCTIONS:
 CONTACT CAMFIL FARR FOR AVAILABILITY OF OTHER SPECIAL SIZES AND FEATURES. SPECIFY BY NAME/ EFFICIENCY/FACE DIMENSIONS/POCKET DEPTH/POCKET SIZE AND HEADER THICKNESS.

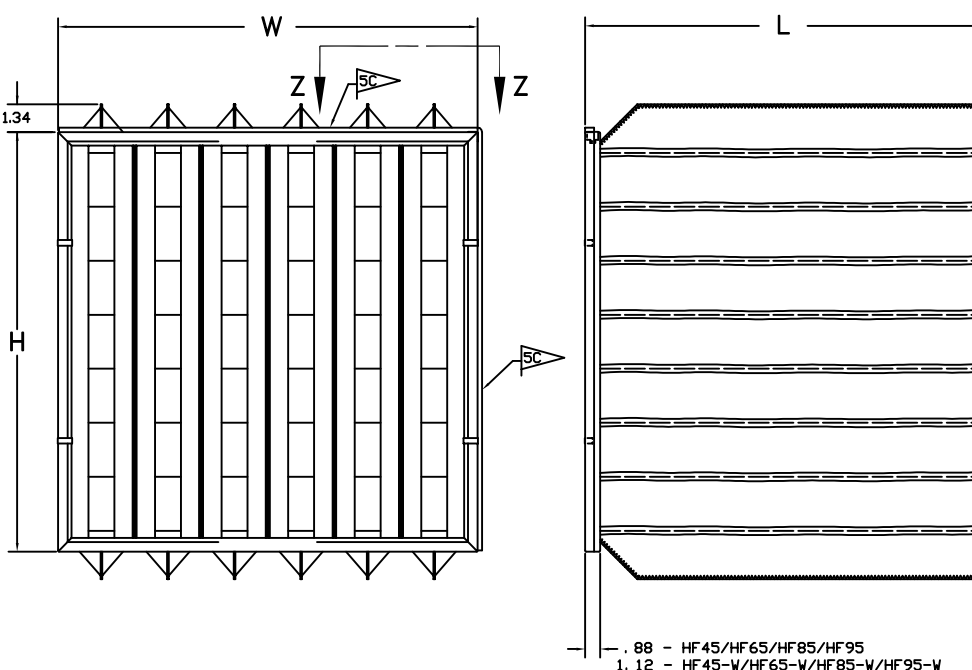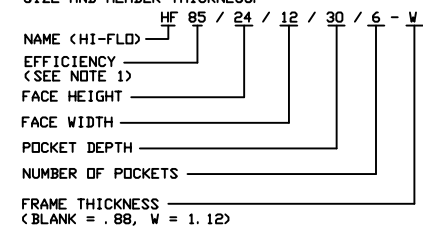

PERFORMANCE NOTES:

- SEE BULLETIN 1203-(LATEST REV.) FOR PRESSURE DROP (INITIAL AND FINAL), MEDIA AREA AND AIRFLOW CAPACITY. PERFORMANCE TOLERANCE IS IN ACCORDANCE WITH THE AIR STANDARD 850, SECTION 7.4.
- CAMFIL FARR RECOMMENDS FILTERS TO BE INSTALLED WITH THE PLEATS RUNNING PARALLEL TO HEIGHT DIMENSION.
- OPERATING TEMPERATURE:
 - CONTINUOUS = 160°F
 - INTERMITTENT = 200°F
- SEE BULLETIN 1203-(LATEST REV.) FOR LIFE CYCLE VS EFFICIENCY GRAPH.
- RECOMMENDED FINAL RESISTANCE TO BE 1.0" W.G.

F	08/02/06	REVISED PER SALES	14955-AM	AC	CAM	Cesar
A	02/27/98	FIRST ISSUE	14126-B	RR		Cesar
REV.	DATE	DESCRIPTION	EWD	DFT	CK	APP
©Camfil Farr http://www.camfilfarr.com						
DESCRIPTION						
HI-FLO CL2 FILTER						
HF45, HF65, HF85 & HF95 WITH .88 HEADER FRAME						
HF45-W, HF65-W, HF85-W & HF95-W WITH 1.12 HEADER FRAME						
SHEET	DRAWING NUMBER:				REV.	
1 OF 1	400442				F	