



NOMINAL SIZE (INCH)	ACTUAL SIZE		ORDERING REFERENCE	AIRFLOW CAPACITY (CFM)	MEDIA AREA (SQ FT)	WEIGHT (LBS)
	H	W				
24 X 24 X 4	23.38	23.38	074987001	2400	25.2	3.05
24 X 20 X 4	23.38	19.38	074987002	2000	20.7	2.53
24 X 12 X 4	23.38	11.38	074987003	1200	12.6	1.60
12 X 24 X 4	11.38	23.38	074987004	1200	11.3	1.45
20 X 24 X 4	19.38	23.38	074987005	2000	20.1	2.45
INITIAL PRESSURE DROP (IN. W.G.)			0.44			
FINAL PRESSURE DROP (IN. W.G.)			1.00			

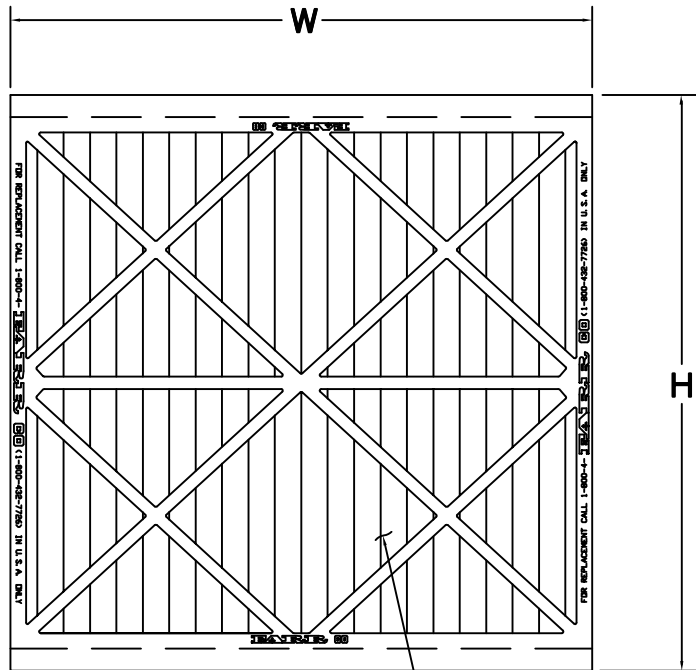

PLEATS ON DASH NO. 001, 002 & 003
RUN VERTICAL AS SHOWN
PLEATS ON DASH NO. 004 & 005
RUN HORIZONTAL

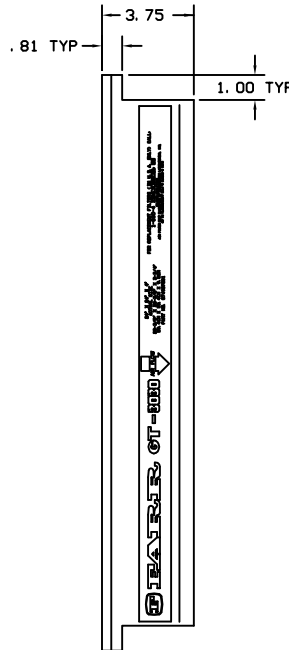


GENERAL NOTES:

- MEDIUM EFFICIENCY, MERV 7 (25-30%) PANEL PLEATED DISPOSABLE. FILTER EFFICIENCY IS MINIMUM MERV RATING WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.2-1999 AND MINIMUM DUST SPOT EFFICIENCY WHEN TESTED IN ACCORDANCE WITH ASHRAE 52.1-1992.
- AVAILABLE SIZES (NOMINAL) AND EFFICIENCIES: SEE TABULATION BLOCK.
- SEE CAMFIL FARR BULLETIN 1003-(LATEST REV.) FOR OTHER FEATURES, CONSTRUCTION AND PERFORMANCE CHARACTERISTICS.
- FILTER CLASSIFIED BY UNDERWRITERS LABORATORIES AS TO FLAMMABILITY ONLY U.L. CLASS 2.
- PHYSICAL DATA (MATERIAL OF CONSTRUCTION):
A. FRAME: HIGH WET-STRENGTH BEVERAGE BOARD WITH DIAGONAL SUPPORT MEMBERS.
B. MEDIA: PLEATED, NON-WOVEN, REINFORCED COTTON/SYNTHETIC MEDIA BLEND, BONDED TO A WELDED WIRE SUPPORT GRID.
- ORDERING INSTRUCTIONS:
SPECIFY BY NAME, MEDIA TYPE (EFFICIENCY), U.L. CLASS, NOMINAL SIZE (HxWxD) AND ORDERING REFERENCE.
EXAMPLE:
30/30-SA U.L. CLASS 2, SIZE 24x24x4, P/N 0074987001.
30/30-SA U.L. CLASS 2, SIZE 24x20x4, P/N 0774987002.

PERFORMANCE NOTES:

- SEE TABULATION BLOCK FOR PRESSURE DROP (INITIAL AND FINAL) AND AIRFLOW CAPACITY. PERFORMANCE TOLERANCE IS IN ACCORDANCE WITH AIR STANDARD 850, SECTION 7.4.
- CAMFIL FARR RECOMMENDS FILTER TO BE INSTALLED WITH THE PLEATS RUNNING PARALLEL TO HEIGHT DIMENSION.
- OPERATING TEMPERATURE:
A. CONTINUOUS = 180°F
B. INTERMITTENT = 200°F
- SEE RESISTANCE VERSUS AIRFLOW BULLETIN 1003-IRVA (LATEST REV.) FOR VARIOUS AIRFLOW CAPACITIES.

B	08/02/06	REVISED PER SALES	14955-AM	AC	CAM	Cesal
REV	DATE	DESCRIPTION	EWD	DFT	CK	APP
 http://www.camfilfarr.com						
DESCRIPTION						
30/30-SA CL2 FILTER						
25-30%						
3.75 THICK						
SHEET		DRAWING NUMBER			REV	
1 OF 1		402878			B	