


Final resistance (maximum recommended) is 1.5" w.g. (250 Pa).  
 System design may dictate a lower change out point.  
 Maximum continuous operating temperature 200° F (93° C).  
 Consult factory before operating in dotted line region.

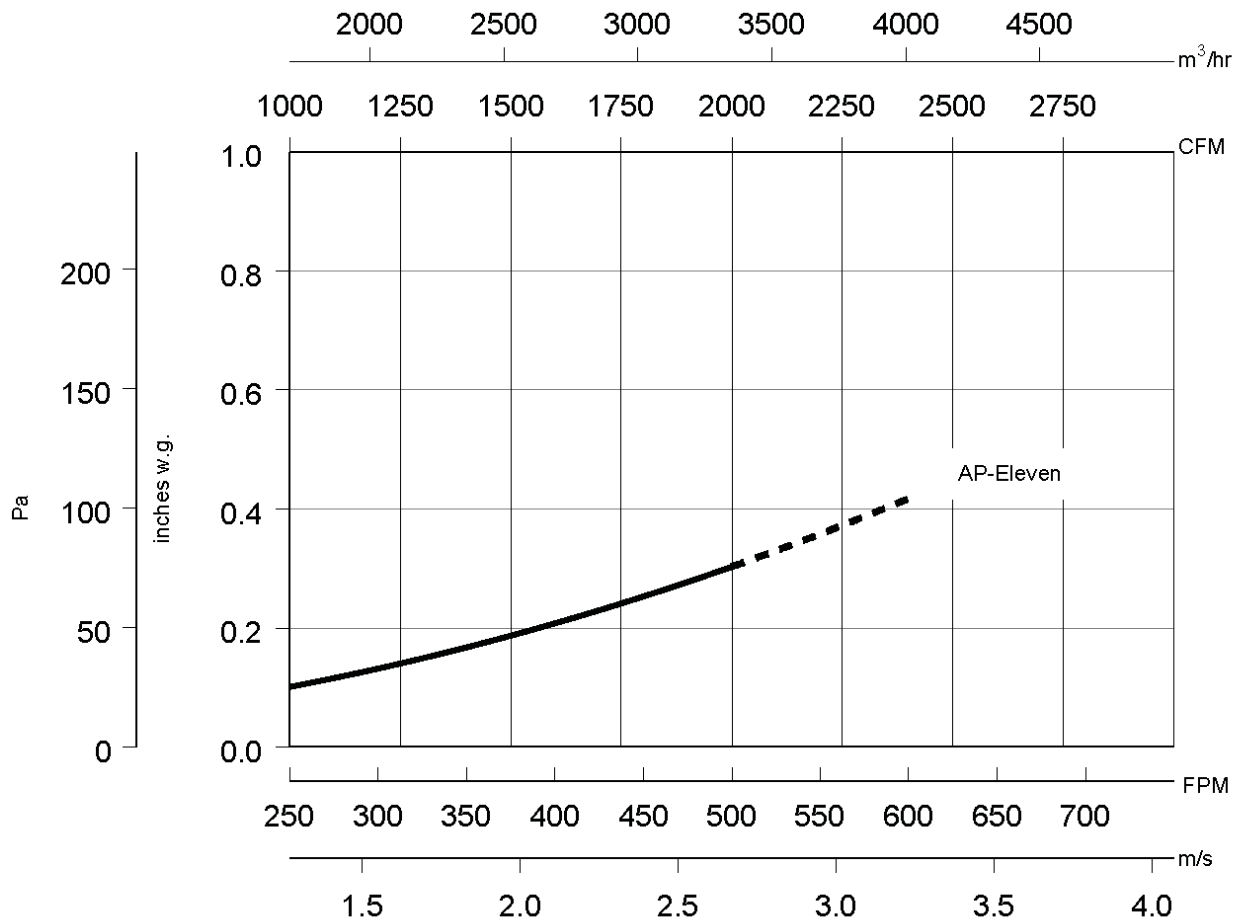

Camfil Farr	Technical Data
AP-Eleven	1035 - IRVA- 0307
Camfil Farr - clean air solutions	