

Aeropleat® IV


Initial Resistance Versus Airflow

Final resistance (maximum recommended) is 1.0" w.g. (250 Pa.)

System design may dictate a lower change out point.

Maximum continuous operating temperature 180° F (82° C).

Consult factory before operating in dotted line region.

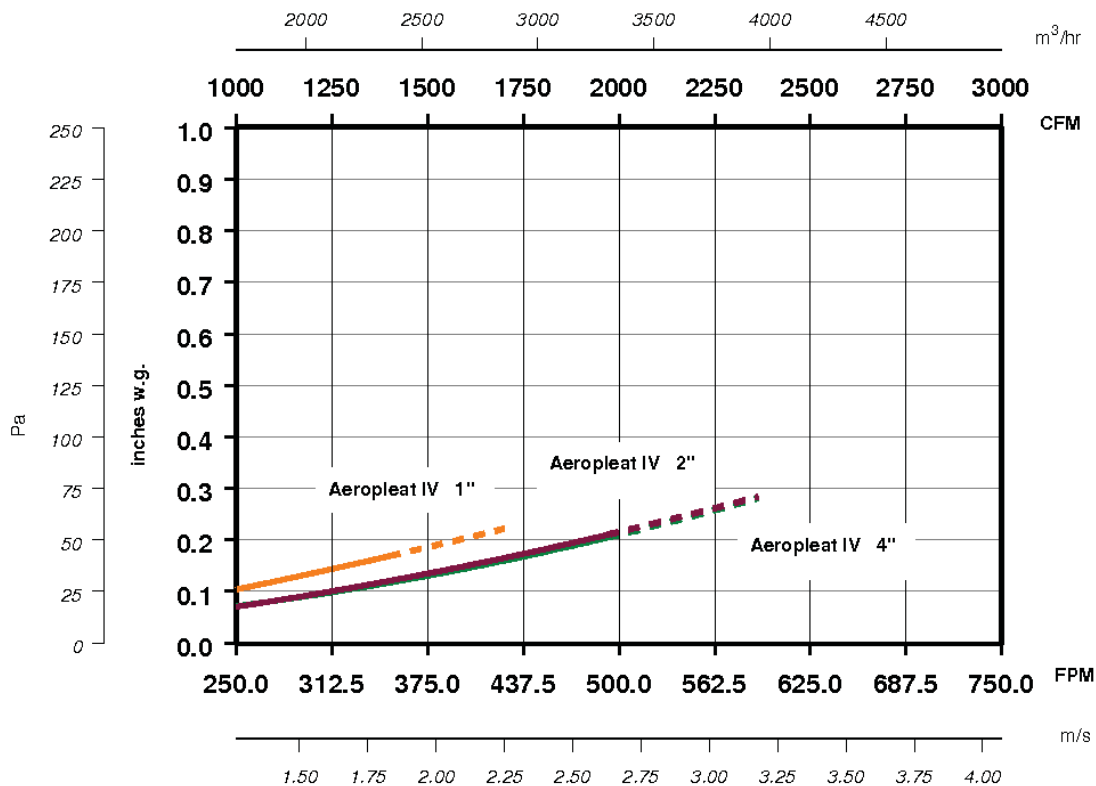

Camfil Farr	Technical Data
Aeropleat® IV	1012-IRVA - 0409
Camfil Farr - clean air solutions	