


Opti-Pac[®]

Initial Resistance Versus Airflow

Final resistance (maximum recommended) is 1.5" w.g. (373 Pa).
 System design may dictate a lower change out point.
 Maximum continuous operating temperature 140° F (60° C).
 Consult factory before operating in dotted line region.

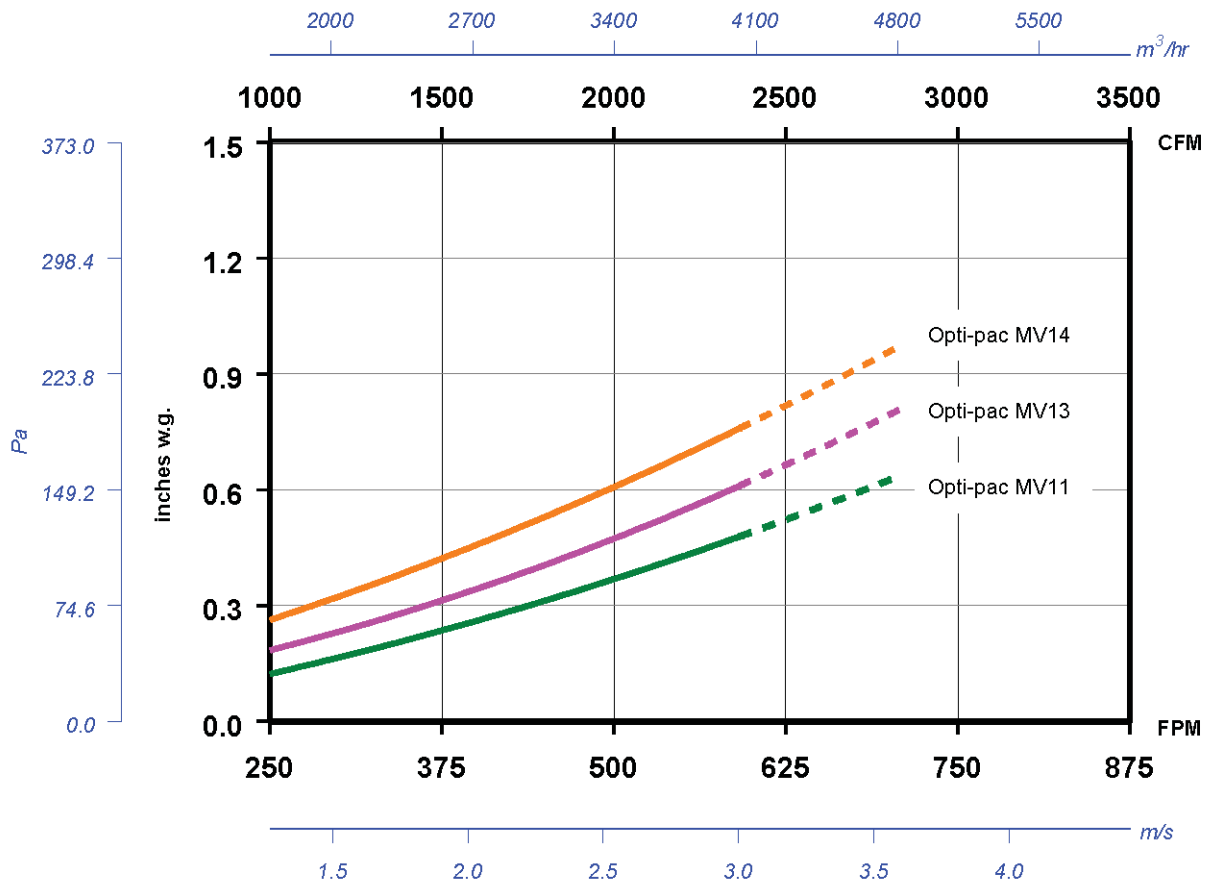

Camfil Farr	Technical Data
Opti-Pac [®]	1608-IRVA - 0608
Camfil Farr - clean air solutions	